



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp®\_rate2006 = 2730

SPECfp\_rate\_base2006 = 2670

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

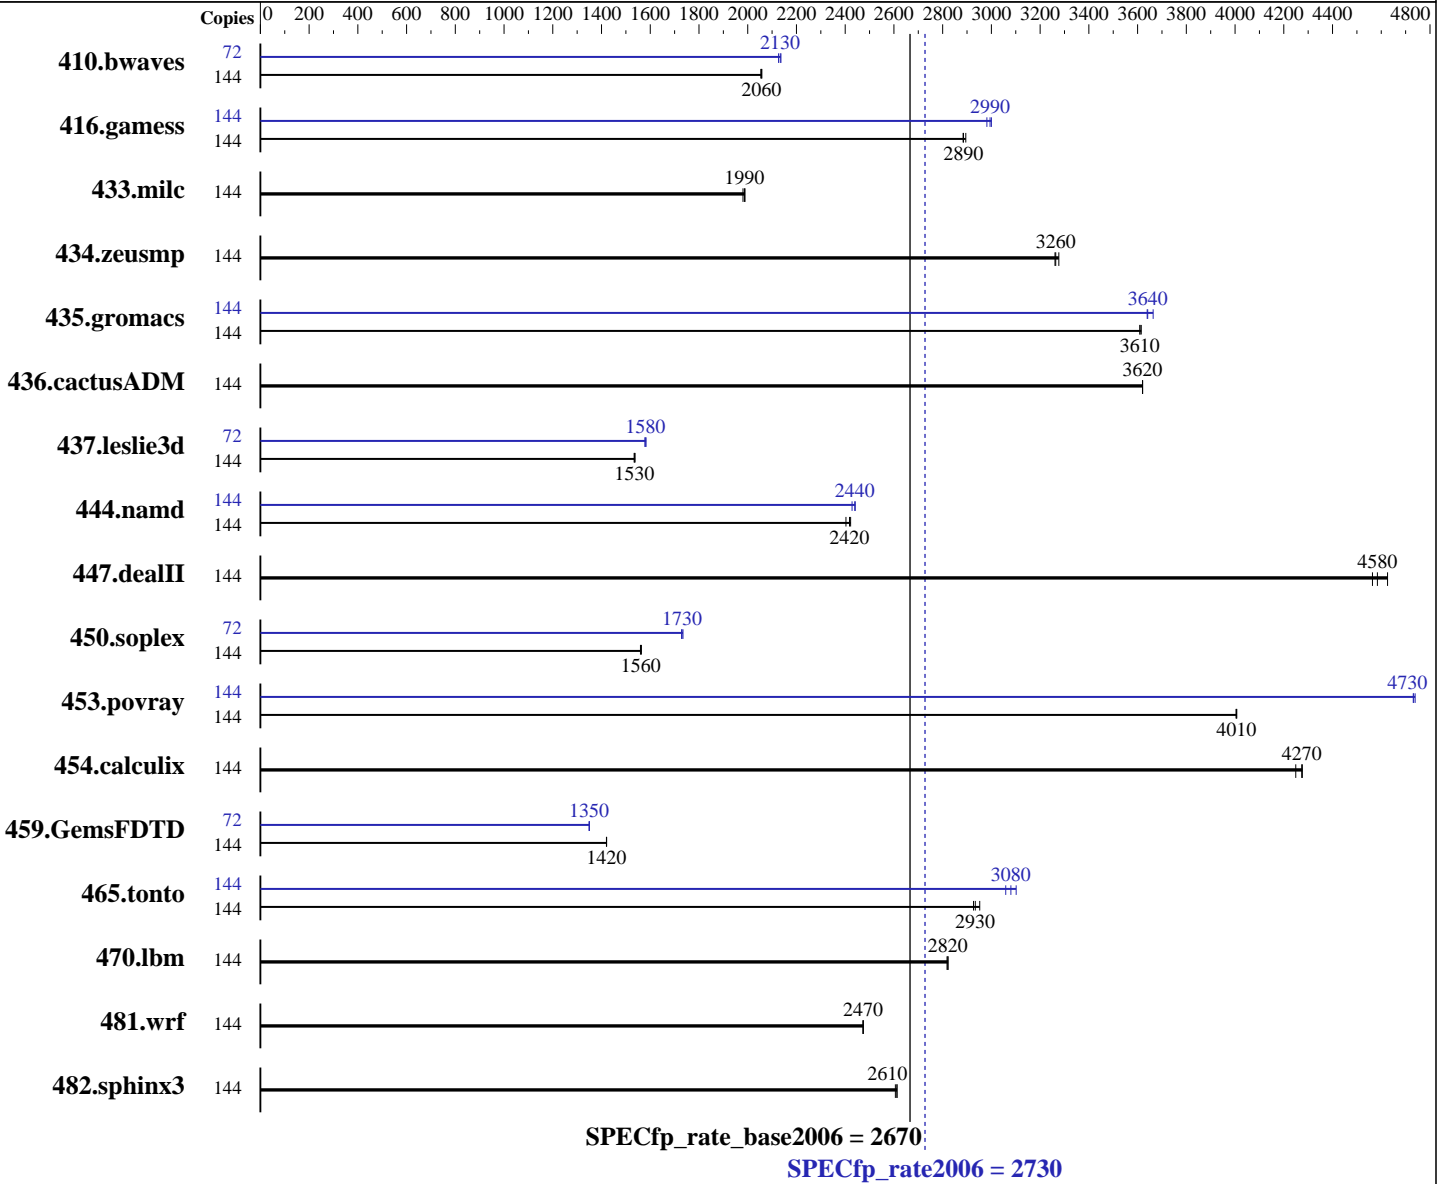

### Hardware

CPU Name: Intel Xeon Gold 6140  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp\_rate2006 = 2730

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp\_rate\_base2006 = 2670

CPU2006 license: 9017

Test date: Nov-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SAS SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	951	2060	953	2050	<u>952</u>	<u>2060</u>	72	458	2140	<u>459</u>	<u>2130</u>	460	2130
416.gamess	144	974	2890	<u>977</u>	<u>2890</u>	978	2880	144	<u>942</u>	<u>2990</u>	940	3000	946	2980
433.milc	144	665	1990	667	1980	<u>665</u>	<u>1990</u>	144	665	1990	667	1980	<u>665</u>	<u>1990</u>
434.zeusmp	144	402	3260	400	3280	<u>401</u>	<u>3260</u>	144	402	3260	400	3280	<u>401</u>	<u>3260</u>
435.gromacs	144	<u>285</u>	<u>3610</u>	284	3610	285	3610	144	281	3660	<u>282</u>	<u>3640</u>	283	3640
436.cactusADM	144	475	3620	475	3620	<u>475</u>	<u>3620</u>	144	475	3620	475	3620	<u>475</u>	<u>3620</u>
437.leslie3d	144	880	1540	882	1530	<u>882</u>	<u>1530</u>	72	428	1580	<u>428</u>	<u>1580</u>	429	1580
444.namd	144	481	2400	<u>478</u>	<u>2420</u>	477	2420	144	476	2430	<u>473</u>	<u>2440</u>	473	2440
447.dealII	144	356	4630	<u>359</u>	<u>4580</u>	361	4560	144	356	4630	<u>359</u>	<u>4580</u>	361	4560
450.soplex	144	<u>769</u>	<u>1560</u>	770	1560	768	1560	72	346	1730	347	1730	<u>347</u>	<u>1730</u>
453.povray	144	<u>191</u>	<u>4010</u>	191	4010	191	4000	144	162	4740	<u>162</u>	<u>4730</u>	162	4730
454.calculix	144	<u>278</u>	<u>4270</u>	278	4280	280	4250	144	<u>278</u>	<u>4270</u>	278	4280	280	4250
459.GemsFDTD	144	1076	1420	1075	1420	<u>1076</u>	<u>1420</u>	72	566	1350	566	1350	<u>566</u>	<u>1350</u>
465.tonto	144	480	2950	<u>483</u>	<u>2930</u>	484	2930	144	457	3100	<u>460</u>	<u>3080</u>	463	3060
470.lbm	144	<u>701</u>	<u>2820</u>	702	2820	701	2820	144	<u>701</u>	<u>2820</u>	702	2820	701	2820
481.wrf	144	650	2470	<u>650</u>	<u>2470</u>	650	2470	144	650	2470	<u>650</u>	<u>2470</u>	650	2470
482.sphinx3	144	1074	2610	<u>1074</u>	<u>2610</u>	1077	2610	144	1074	2610	<u>1074</u>	<u>2610</u>	1077	2610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
Choose Operating Mode set to Maximum Performance  
Execute Disable Bit set to Disable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp\_rate2006 = 2730

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp\_rate\_base2006 = 2670

CPU2006 license: 9017

Test date: Nov-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

### Platform Notes (Continued)

DCU Streamer Prefetcher set to Disable  
 Intel Virtualization Technology set to Disable  
 Stale AtoS set to Enable  
 LLC dead line alloc set to Disable  
 SNC set to Enable  
 Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on Electron-02 Mon Nov 27 00:09:41 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
 4 "physical id"s (chips)
144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 25344 KB
```

```
From /proc/meminfo
MemTotal:      1584974632 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:12:sp2"
```

```
uname -a:
Linux Electron-02 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 2730

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp\_rate\_base2006 = 2670

CPU2006 license: 9017

Test date: Nov-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Platform Notes (Continued)

(9464f67) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Nov 26 13:56

SPEC is set to: /home/cpu2006-1.2-ic17.0u3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	689G	130G	560G	19%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE115E-1.01]- 08/11/2017

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 2730

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp\_rate\_base2006 = 2670

CPU2006 license: 9017

Test date: Nov-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 2730

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp\_rate\_base2006 = 2670

CPU2006 license: 9017

Test date: Nov-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 2730

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

SPECfp\_rate\_base2006 = 2670

CPU2006 license: 9017

Test date: Nov-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR850  
(2.30 GHz, Intel Xeon Gold 6140)

**SPECfp\_rate2006 = 2730**

**SPECfp\_rate\_base2006 = 2670**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Nov-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 27 12:06:17 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 December 2017.