



SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.30 GHz, Intel Xeon Gold 6140M)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 3350

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

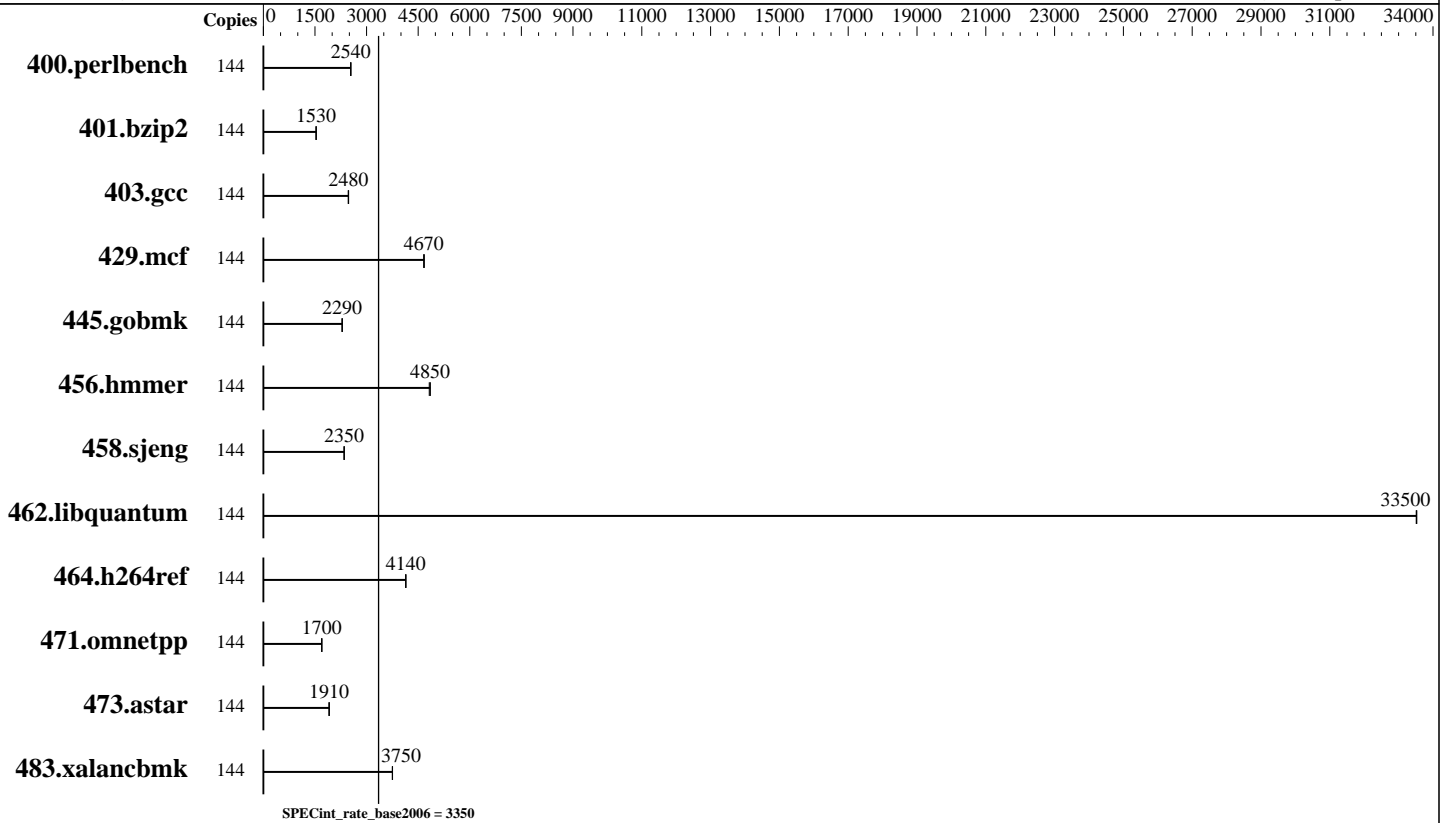

Hardware

CPU Name: Intel Xeon Gold 6140M
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2, 4 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 24.75 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Kernel 4.4.73-5-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(2.30 GHz, Intel Xeon Gold 6140M)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3350

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	144	553	2550	<u>554</u>	<u>2540</u>	554	2540									
401.bzip2	144	904	1540	<u>906</u>	<u>1530</u>	908	1530									
403.gcc	144	470	2470	<u>468</u>	<u>2480</u>	468	2480									
429.mcf	144	282	4660	281	4680	<u>281</u>	<u>4670</u>									
445.gobmk	144	658	2290	<u>659</u>	<u>2290</u>	660	2290									
456.hammer	144	279	4820	<u>277</u>	<u>4850</u>	277	4850									
458.sjeng	144	741	2350	<u>742</u>	<u>2350</u>	742	2350									
462.libquantum	144	89.0	33500	89.0	33500	<u>89.0</u>	<u>33500</u>									
464.h264ref	144	<u>770</u>	<u>4140</u>	769	4140	770	4140									
471.omnetpp	144	531	1700	<u>530</u>	<u>1700</u>	530	1700									
473.astar	144	528	1910	<u>529</u>	<u>1910</u>	529	1910									
483.xalancbmk	144	<u>265</u>	<u>3750</u>	265	3750	265	3750									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

Platform Notes

```
BIOS Configuration:
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
State A to S set to Enabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E State
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.30 GHz, Intel Xeon Gold 6140M)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3350

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Platform Notes (Continued)

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-irgu Fri Sep 29 01:28:39 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6140M CPU @ 2.30GHz
 4 "physical id"s (chips)
 144 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings   : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

cache size : 25344 KB

From /proc/meminfo

```
MemTotal:      792273828 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsc_release -d

SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
```

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-irgu 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017
(b7ce4e4) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.30 GHz, Intel Xeon Gold 6140M)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3350

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Platform Notes (Continued)

run-level 3 Sep 29 01:24

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	11G	320G	4%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 08/18/2017

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
 401.bzip2: -D_FILE_OFFSET_BITS=64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -D_FILE_OFFSET_BITS=64
 458.sjeng: -D_FILE_OFFSET_BITS=64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.30 GHz, Intel Xeon Gold 6140M)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3350

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Portability Flags (Continued)

473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 16 12:09:28 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2018.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>