



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL360 Gen10  
(2.80 GHz, Intel Xeon Gold 6143)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1890**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

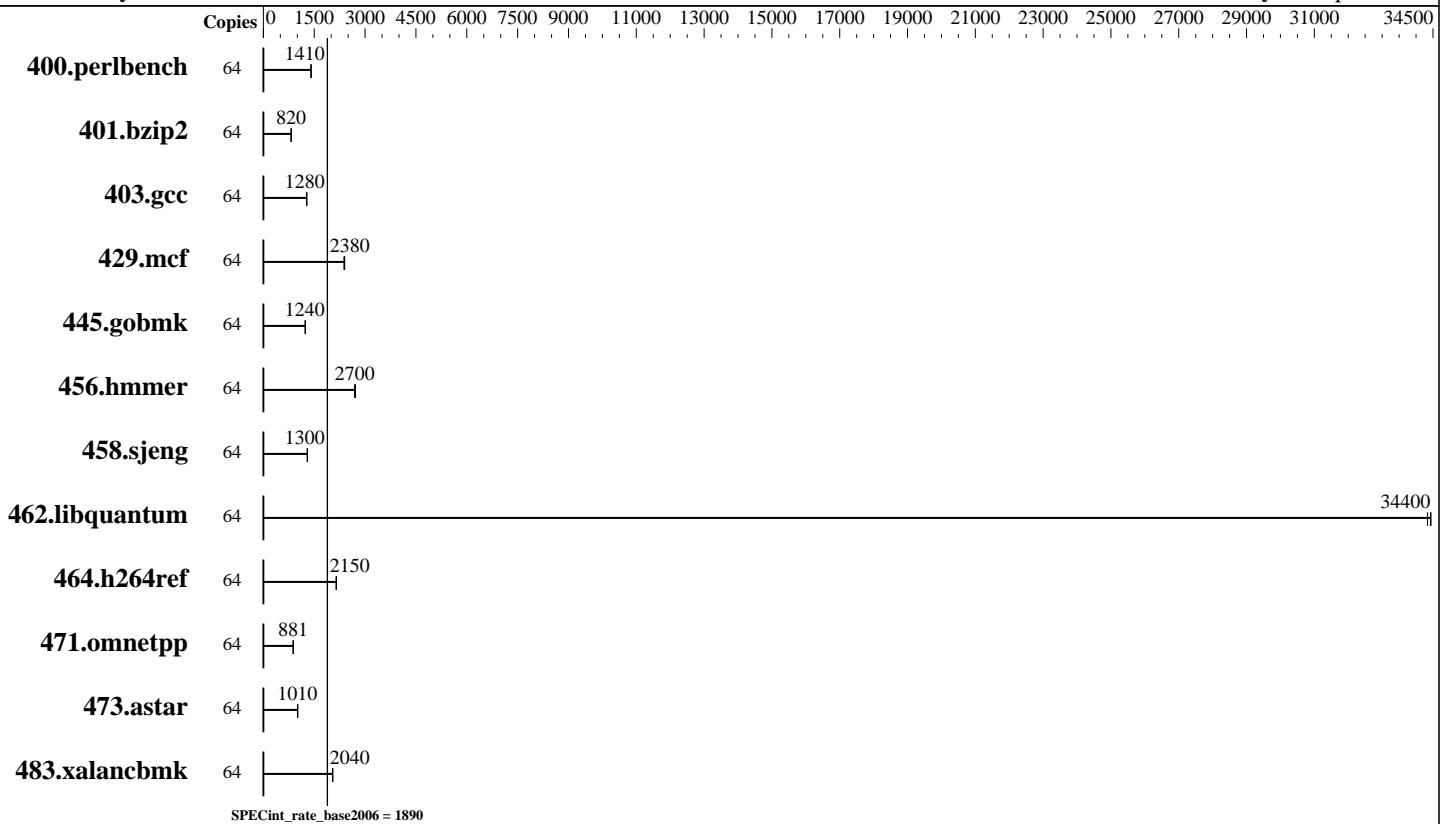

## Hardware

CPU Name: Intel Xeon Gold 6143  
CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
CPU MHz: 2800  
FPU: Integrated  
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
CPU(s) orderable: 1, 2 chip(s)  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 22 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
Kernel 4.4.21-69-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: Not Applicable  
Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL360 Gen10  
(2.80 GHz, Intel Xeon Gold 6143)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1890**

CPU2006 license: 3

Test date: Dec-2017

Test sponsor: HPE

Hardware Availability: Dec-2017

Tested by: HPE

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<b>445</b>	<b>1410</b>	445	1410	444	1410							
401.bzip2	64	754	820	752	821	<b>753</b>	<b>820</b>							
403.gcc	64	402	1280	405	1270	<b>403</b>	<b>1280</b>							
429.mcf	64	243	2400	<b>245</b>	<b>2380</b>	245	2380							
445.gobmk	64	<b>543</b>	<b>1240</b>	543	1240	544	1230							
456.hmmer	64	<b>221</b>	<b>2700</b>	220	2720	222	2690							
458.sjeng	64	597	1300	<b>597</b>	<b>1300</b>	597	1300							
462.libquantum	64	38.5	34400	38.6	34300	<b>38.5</b>	<b>34400</b>							
464.h264ref	64	658	2150	<b>658</b>	<b>2150</b>	660	2150							
471.omnetpp	64	455	880	454	882	<b>454</b>	<b>881</b>							
473.astar	64	444	1010	<b>444</b>	<b>1010</b>	444	1010							
483.xalancbmk	64	216	2050	216	2040	<b>216</b>	<b>2040</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa\_balancing"

## Platform Notes

### BIOS Configuration:

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E State

Sysinfo program /cpu2006/config/sysinfo.rev6993

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1890**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-lvuc Sun Dec 10 11:40:45 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6143 CPU @ 2.80GHz
        2 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 16
    siblings : 32
    physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:       197550460 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-lvuc 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 10 11:30
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   405G  133G  273G  33%  /home
```

Additional information from dmidecode:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1890**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U32 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2018.0.082/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2018.0.082/linux/lib/ia32

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
 401.bzip2: -D_FILE_OFFSET_BITS=64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hammer: -D_FILE_OFFSET_BITS=64
 458sjeng: -D_FILE_OFFSET_BITS=64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.80 GHz, Intel Xeon Gold 6143)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1890**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Dec-2017

**Software Availability:** Sep-2017

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 16 12:09:41 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2018.