



SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECint®2006 =

Not Run

SPECint_base2006 =

65.1

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

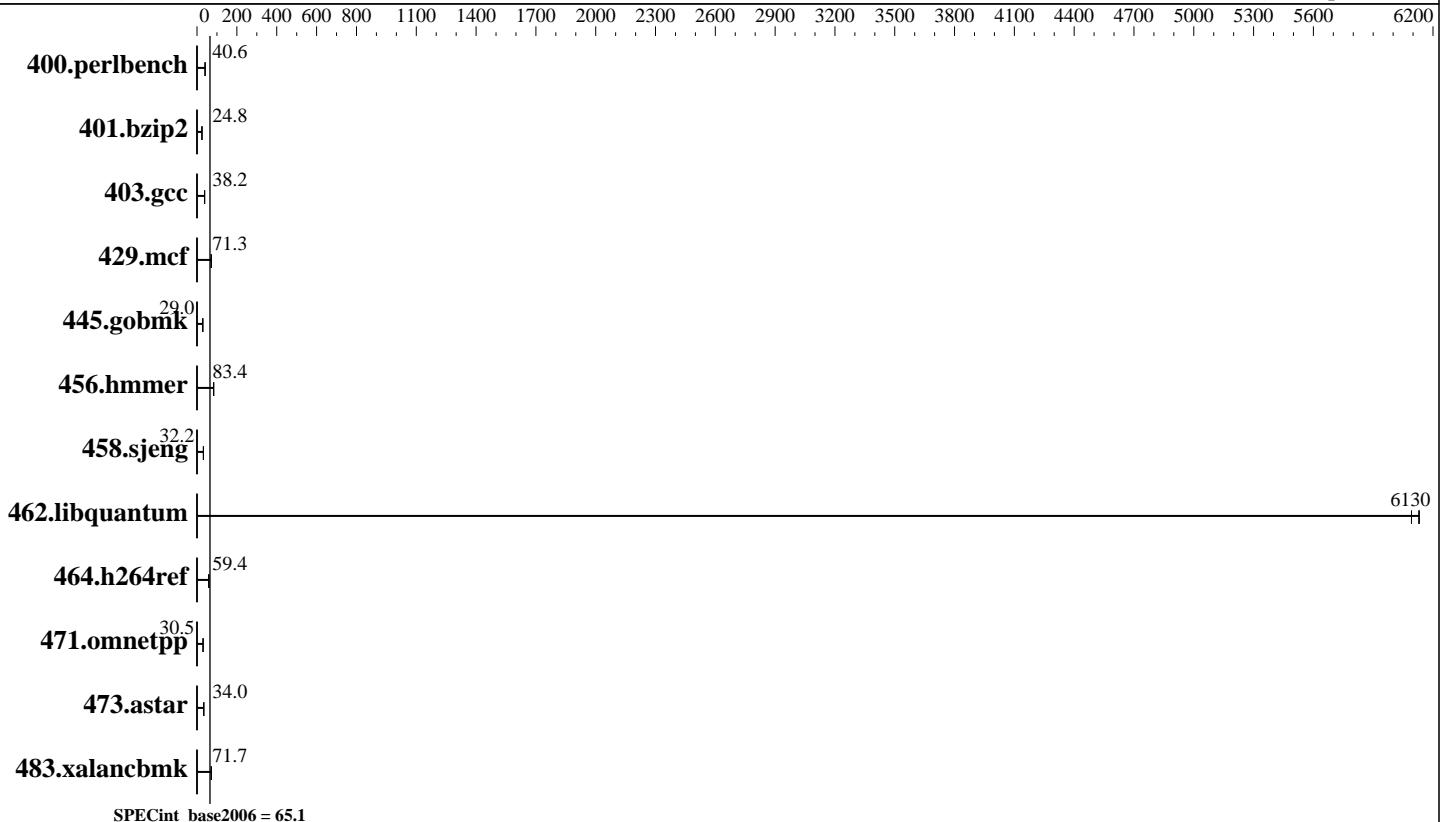

Hardware

CPU Name:	Intel Xeon Gold 5120
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	19.25 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
Disk Subsystem:	1 x 480 GB SATA SSD, RAID 0
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo)
Compiler:	Kernel 3.10.0-514.el7.x86_64
Auto Parallel:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECint2006 =

Not Run

SPECint_base2006 =

65.1

CPU2006 license: 3

Test date: Dec-2017

Test sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	240	40.7	241	40.5	<u>241</u>	<u>40.6</u>						
401.bzip2	387	24.9	389	24.8	<u>388</u>	<u>24.8</u>						
403.gcc	<u>211</u>	<u>38.2</u>	211	38.1	211	38.2						
429.mcf	128	71.1	127	71.9	<u>128</u>	<u>71.3</u>						
445.gobmk	362	28.9	362	29.0	<u>362</u>	<u>29.0</u>						
456.hmmer	111	83.8	112	83.4	<u>112</u>	<u>83.4</u>						
458.sjeng	376	32.2	376	32.2	<u>376</u>	<u>32.2</u>						
462.libquantum	<u>3.38</u>	<u>6130</u>	3.40	6090	3.38	6130						
464.h264ref	372	59.5	<u>372</u>	<u>59.4</u>	373	59.3						
471.omnetpp	204	30.7	206	30.4	<u>205</u>	<u>30.5</u>						
473.astar	207	33.9	206	34.1	<u>207</u>	<u>34.0</u>						
483.xalancbmk	<u>96.2</u>	<u>71.7</u>	96.2	71.7	96.2	71.7						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"

Platform Notes

BIOS Configuration:

Intel Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Workload Profile set to Custom

NUMA Group Size Optimization set to Flat

Uncore Frequency Scaling set to Auto

Sysinfo program /home/cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on localhost.localdomain Fri Dec 22 02:46:02 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECint2006 =

Not Run

SPECint_base2006 =

65.1

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Dec-2017

Hardware Availability:

Oct-2017

Software Availability:

Apr-2017

Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
  2 "physical id"s (chips)
  28 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings   : 14
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 19712 KB
```

```
From /proc/meminfo
MemTotal:      395930928 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.3 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.3"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 22 02:42
```

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   392G   34G  359G   9% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I42 09/27/2017

Memory:

24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz, configured at 2400 MHz

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECint2006 =

Not Run

SPECint_base2006 =

65.1

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP_NUM_THREADS = "28"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECint2006 =

Not Run

SPECint_base2006 =

65.1

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Dec-2017

Hardware Availability:

Oct-2017

Software Availability:

Apr-2017

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hammer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-autop32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10

(2.20 GHz, Intel Xeon Gold 5120)

SPECint2006 =

Not Run

SPECint_base2006 =

65.1

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Dec-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 14 11:30:04 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 June 2018.