



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

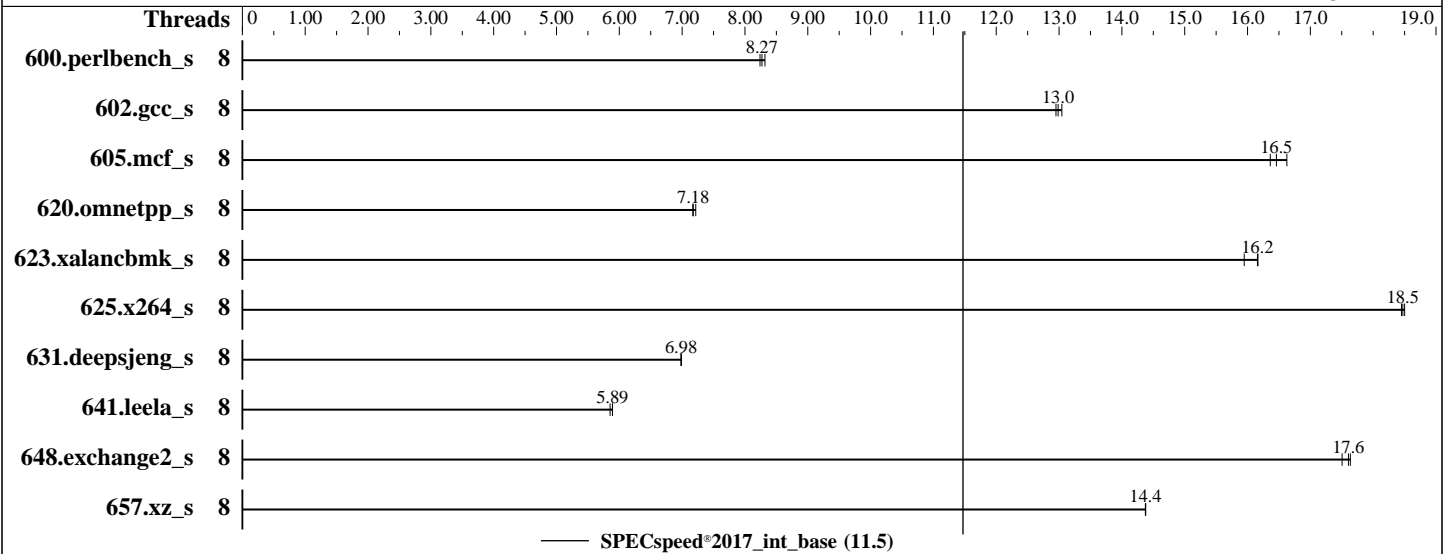

Hardware

CPU Name: Intel Xeon E-2278G
 Max MHz: 5000
 Nominal: 3400
 Enabled: 8 cores, 1 chip
 Orderable: 1 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 16 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-U)
 Storage: 1 x 400 GB SATA SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
 Kernel 4.12.14-195-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version U43 08/16/2019 released Aug-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator v5.0.1
 Power Management: --



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	8	215	8.24	<u>215</u>	<u>8.27</u>	213	8.32									
602.gcc_s	8	307	13.0	305	13.0	<u>307</u>	<u>13.0</u>									
605.mcf_s	8	289	16.4	<u>287</u>	<u>16.5</u>	284	16.6									
620.omnetpp_s	8	<u>227</u>	<u>7.18</u>	227	7.17	226	7.22									
623.xalancbmk_s	8	88.9	15.9	<u>87.7</u>	<u>16.2</u>	87.7	16.2									
625.x264_s	8	95.6	18.5	95.3	18.5	<u>95.5</u>	<u>18.5</u>									
631.deepsjeng_s	8	<u>205</u>	<u>6.98</u>	205	6.98	205	6.99									
641.leela_s	8	290	5.89	291	5.85	<u>290</u>	<u>5.89</u>									
648.exchange2_s	8	168	17.5	167	17.6	<u>167</u>	<u>17.6</u>									
657.xz_s	8	<u>430</u>	<u>14.4</u>	430	14.4	430	14.4									

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
IRQ balance service was stopped using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
built with RedHat Enterprise 7.5, and the system compiler gcc 4.8.5;
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes

BIOS Configuration:

Hyper Threading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
Workload Profile set to General Peak Frequency Compute
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-vb4y Thu Aug 29 12:21:57 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E-2278G CPU @ 3.40GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 8
siblings       : 8
physical 0:    cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
Address sizes:   39 bits physical, 48 bits virtual
CPU(s):          8
On-line CPU(s) list: 0-7
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s):       1
NUMA node(s):   1
Vendor ID:       GenuineIntel
CPU family:      6
Model:           158
Model name:      Intel(R) Xeon(R) E-2278G CPU @ 3.40GHz
Stepping:        13
CPU MHz:         3400.000
BogoMIPS:        6816.00
Virtualization:  VT-x
L1d cache:      32K
L1i cache:      32K
L2 cache:        256K
L3 cache:        16384K
NUMA node0 CPU(s): 0-7
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt
intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts md_clear flush_lld
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16384 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 64021 MB
node 0 free: 63111 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal:        65558280 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

```

uname -a:
Linux linux-vb4y 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Aug 29 12:09

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	270G	52G	218G	20%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U43 08/16/2019

Memory:

4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
          | 625.x264_s(base) 657.xz_s(base)
-----

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```

=====
C++       | 620.omnetpp_s(base) 623.xalanbmk_s(base) 631.deepsjeng_s(base)
          | 641.leela_s(base)
-----

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```

=====
Fortran   | 648.exchange2_s(base)
-----

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmallo
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECspeed®2017_int_base = 11.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-29 12:21:57-0400.

Report generated on 2019-11-08 14:22:04 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-08.