



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECspeed®2017_fp_base = 100

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

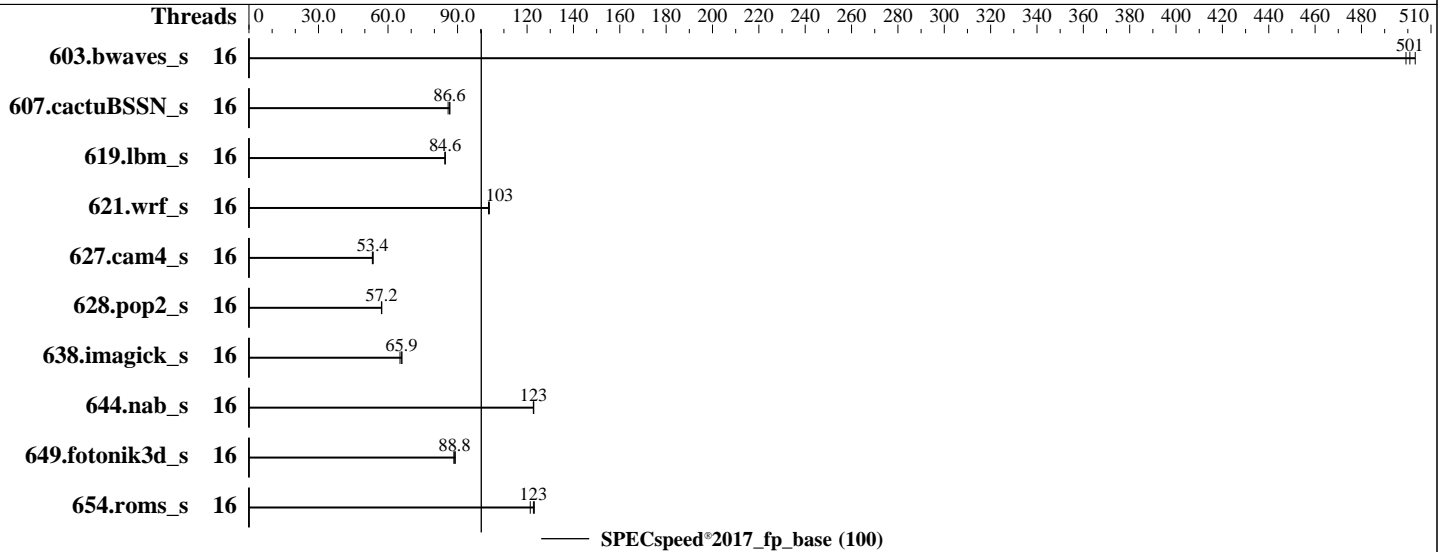

Hardware

CPU Name: Intel Xeon Platinum 8256
Max MHz: 3900
Nominal: 3800
Enabled: 16 cores, 4 chips
Orderable: 2,3,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 16.5 MB I+D on chip per chip
Other: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2933Y-R)
Storage: 1 x 800 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64)
Kernel 4.12.14-25.13-default
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;
Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
Parallel: Yes
Firmware: Lenovo BIOS Version PSE122R 1.53 released Aug-2019 tested as PSE121R 1.53 Jul-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECSpeed®2017_fp_base = 100

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECSpeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	118	501	118	499	117	503							
607.cactuBSSN_s	16	193	86.6	194	85.9	192	86.7							
619.lbm_s	16	61.9	84.7	61.9	84.6	61.9	84.6							
621.wrf_s	16	128	103	128	103	128	104							
627.cam4_s	16	166	53.4	166	53.2	165	53.6							
628.pop2_s	16	207	57.2	208	57.2	207	57.3							
638.imagick_s	16	221	65.2	219	66.0	219	65.9							
644.nab_s	16	142	123	142	123	142	123							
649.fotonik3d_s	16	103	88.8	103	88.4	102	89.0							
654.roms_s	16	128	123	130	121	128	123							

SPECSpeed®2017_fp_base = 100

SPECSpeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages disabled by default
echo never > /sys/kernel/mm/transparent_hugepage/enabled
echo never > /sys/kernel/mm/transparent_hugepage/defrag
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 100

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
CPU P-state Control set to Autonomous
Hyper-Threading set to Disable
Trusted Execution Technology set to Enable
DCU Streamer Prefetcher set to Disable
MONITOR/MWAIT set to Enable
SNC set to Enable

```
Sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-ulb8 Fri Nov 22 20:49:31 2019
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
 4 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4
physical 0: cores 1 5 9 13
physical 1: cores 1 2 5 13
physical 2: cores 4 8 9 13
physical 3: cores 2 5 9 13
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 16
On-line CPU(s) list: 0-15
Thread(s) per core: 1
Core(s) per socket: 4
Socket(s): 4
NUMA node(s): 4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 100

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
Stepping:           6
CPU MHz:            3800.000
CPU max MHz:        3900.0000
CPU min MHz:        1200.0000
BogoMIPS:           7600.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           16896K
NUMA node0 CPU(s): 0-3
NUMA node1 CPU(s): 4-7
NUMA node2 CPU(s): 8-11
NUMA node3 CPU(s): 12-15
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse2 sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3
node 0 size: 193118 MB
node 0 free: 188657 MB
node 1 cpus: 4 5 6 7
node 1 size: 193515 MB
node 1 free: 193101 MB
node 2 cpus: 8 9 10 11
node 2 size: 193486 MB
node 2 free: 193243 MB
node 3 cpus: 12 13 14 15
node 3 size: 193512 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECspeed®2017_fp_base = 100

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

```
node 3 free: 193261 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10
```

```
From /proc/meminfo
MemTotal:          792199484 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux linux-ulb8 4.12.14-25.13-default #1 SMP Tue Aug 14 15:07:35 UTC 2018 (947aa51)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:          No status reported
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Indirect Branch Restricted
                                              Speculation, IBPB, IBRS_FW
```

```
run-level 3 Nov 22 18:11
```

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   744G   75G  670G  10% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Lenovo -[PSE121R-1.53]- 07/03/2019
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 100

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

Vendor: Lenovo
Product: ThinkSystem SR950 -[7X12ABC1WW]-
Product Family: ThinkSystem
Serial: none

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
48x NO DIMM NO DIMM
48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 100

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Compiler Version Notes (Continued)

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 100

ThinkSystem SR950
(3.80 GHz, Intel Xeon Platinum 8256)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-22 07:49:30-0500.
Report generated on 2019-12-26 11:36:07 by CPU2017 PDF formatter v6255.
Originally published on 2019-12-24.