



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus


(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Dec-2020

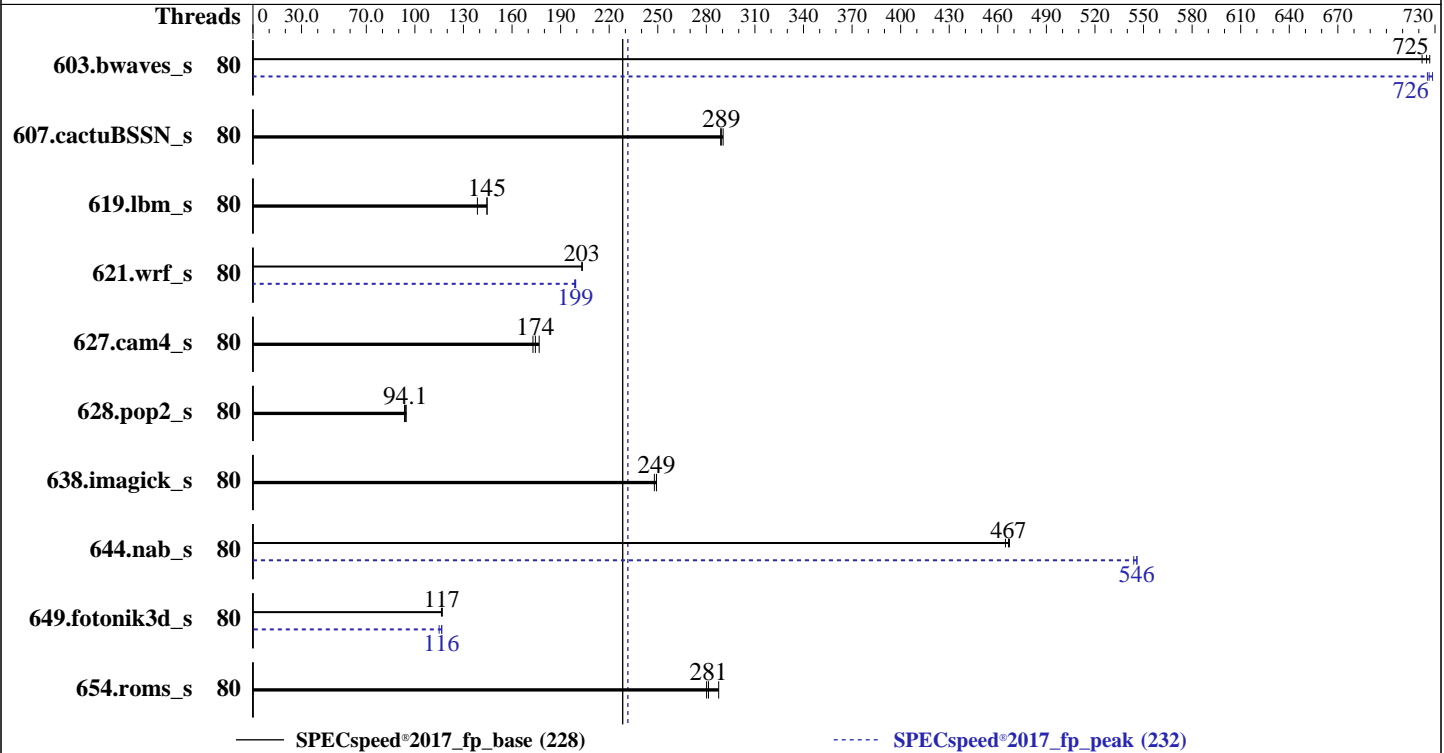

Hardware

CPU Name: Intel Xeon Platinum 8380
Max MHz: 3400
Nominal: 2300
Enabled: 80 cores, 2 chips
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 800 GB SAS SSD, RAID 0
Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)
Kernel 4.18.0-240.el8.x86_64
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel: Yes
Firmware: HPE BIOS Version I44 v1.42 05/16/2021 released Jun-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	80	81.4	725	81.7	722	81.2	727	80	81.3	725	81.2	726	81.0	728
607.cactuBSSN_s	80	57.4	290	57.6	289	57.7	289	80	57.4	290	57.6	289	57.7	289
619.lbm_s	80	36.2	145	36.2	145	37.8	139	80	36.2	145	36.2	145	37.8	139
621.wrf_s	80	65.1	203	65.1	203	65.0	203	80	66.4	199	66.4	199	66.6	199
627.cam4_s	80	51.3	173	50.8	174	50.1	177	80	51.3	173	50.8	174	50.1	177
628.pop2_s	80	126	94.1	127	93.6	125	94.7	80	126	94.1	127	93.6	125	94.7
638.imagick_s	80	57.9	249	57.9	249	58.2	248	80	57.9	249	57.9	249	58.2	248
644.nab_s	80	37.6	465	37.4	467	37.4	467	80	32.1	544	32.0	546	32.0	546
649.fotonik3d_s	80	78.2	117	78.0	117	78.3	116	80	78.3	116	78.2	117	79.3	115
654.roms_s	80	56.2	280	56.0	281	54.7	288	80	56.2	280	56.0	281	54.7	288

SPECspeed®2017_fp_base = **228**

SPECspeed®2017_fp_peak = **232**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/cpu2017/lib/intel64:/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Submitted_by: "Bucek, James" <james.bucek@hpe.com>

Submitted: Tue May 25 00:20:57 EDT 2021

Submission: cpu2017-20210525-26747.sub

Submitted_by: "Bhatnagar, Prateek" <prateek.bhatnagar@hpe.com>

Submitted: Tue Jun 1 09:13:10 EDT 2021

Submission: cpu2017-20210525-26747.sub

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Intel Hyper-Threading set to Disabled

Thermal Configuration set to Maximum Cooling

Advanced Memory Protection set to Advanced ECC

Memory Patrol Scrubbing set to Disabled

Enhanced Processor Performance set to Enabled

Enhanced Processor Performance Profile set to Aggressive

Workload Profile set to Custom

NUMA Group Size Optimization set to Flat

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Minimum Process Idle Power Package C-State set to No Package State

The system ROM used for this result contains Intel microcode version 0xd0002a0 for the Intel Xeon Platinum 8380 processor.

sysinfo program /cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Fri May 21 18:42:35 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 40

siblings : 40

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: May-2021
Hardware Availability: Jun-2021
Software Availability: Dec-2020

Platform Notes (Continued)

25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

From lscpu from util-linux 2.32.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Thread(s) per core: 1
Core(s) per socket: 40
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping: 6
CPU MHz: 866.906
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 61440K
NUMA node0 CPU(s): 0-39
NUMA node1 CPU(s): 40-79
```

```
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Platform Notes (Continued)

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39
node 0 size: 483508 MB
node 0 free: 508463 MB
node 1 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64
65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 1 size: 485098 MB
node 1 free: 514848 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10

```

From /proc/meminfo

```

MemTotal:      1056521504 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/*release* /etc/*version*

```

os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):      Not affected
CVE-2018-3620 (L1 Terminal Fault):   Not affected
Microarchitectural Data Sampling:   Not affected
CVE-2017-5754 (Meltdown):           Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Bypass disabled via prctl and seccomp
Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 May 21 14:41

SPEC is set to: /cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xf	740G	280G	460G	38%	/

From /sys/devices/virtual/dmi/id

Vendor: HPE
 Product: Synergy 480 Gen10 Plus
 Product Family: Synergy
 Serial: QH08NP000Q

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
 16x Micron 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200
 16x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE
 BIOS Version: I44
 BIOS Date: 05/16/2021
 BIOS Revision: 1.42
 Firmware Revision: 2.40

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base)
=====

```

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base)
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
=====
```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

644.nab_s: icx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -fiopenmp
-DSPEC_OPENMP -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10 Plus

(2.30 GHz, Intel Xeon Platinum 8380)

SPECspeed®2017_fp_base = 228

SPECspeed®2017_fp_peak = 232

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

621.wrf_s (continued):

`-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revC.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-05-21 19:42:34-0400.

Report generated on 2021-08-11 14:57:05 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-11.