



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Sep-2021

Hardware Availability: Nov-2021

Software Availability: Jun-2021

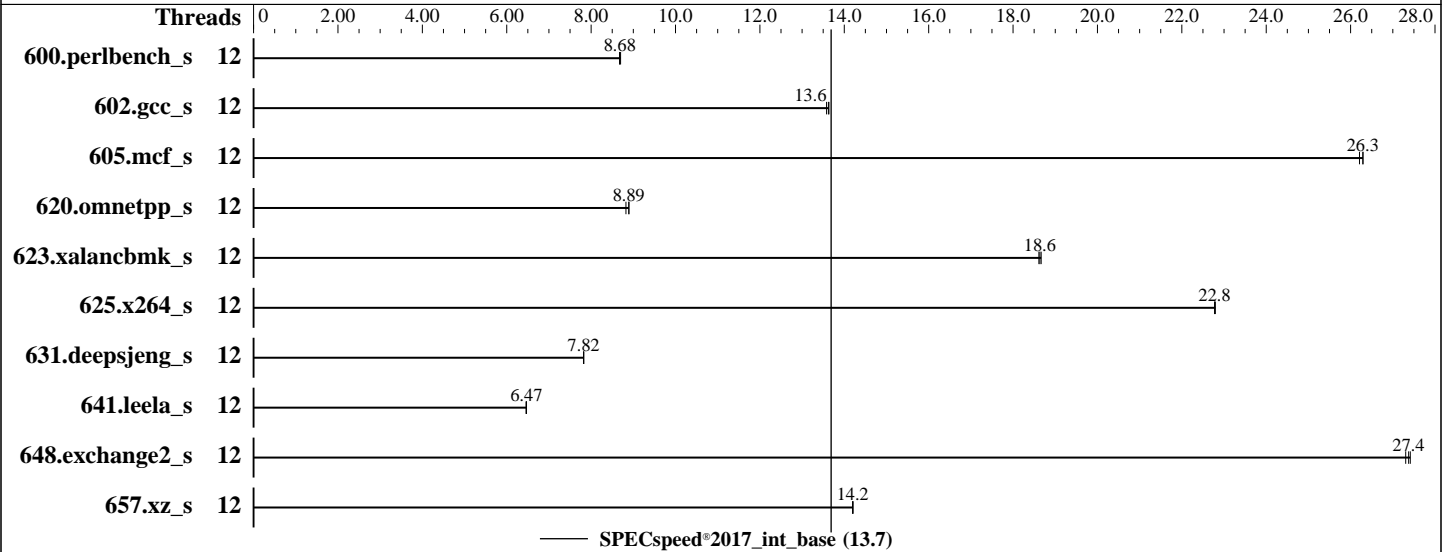

### Hardware

CPU Name: Intel Xeon E-2356G  
 Max MHz: 5000  
 Nominal: 3200  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-3200AA-E)  
 Storage: 1 x SATA M.2 SSD, 480GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP3  
 5.3.18-57-default  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
 Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler  
 Classic Build 20201112 for Linux;  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V5.0.0.22 R1.7.0 for  
 D3930-A1x. Released Nov-2021  
 tested as V5.0.0.22 R1.4.0 for D3930-A1x Sep-2021  
 File System: xfs  
 System State: Run level 5 (graphical)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Sep-2021  
Hardware Availability: Nov-2021  
Software Availability: Jun-2021

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
600.perlbench_s	12	205	8.67	204	8.70	<u>204</u>	<u>8.68</u>									
602.gcc_s	12	292	13.6	<u>292</u>	<u>13.6</u>	293	13.6									
605.mcf_s	12	<u>180</u>	<u>26.3</u>	180	26.3	180	26.2									
620.omnetpp_s	12	<u>183</u>	<u>8.89</u>	183	8.90	185	8.83									
623.xalancbmk_s	12	75.9	18.7	<u>76.0</u>	<u>18.6</u>	76.1	18.6									
625.x264_s	12	<u>77.4</u>	<u>22.8</u>	77.4	22.8	77.4	22.8									
631.deepsjeng_s	12	<u>183</u>	<u>7.82</u>	183	7.82	183	7.82									
641.leela_s	12	264	6.47	<u>264</u>	<u>6.47</u>	264	6.46									
648.exchange2_s	12	107	27.4	108	27.3	<u>107</u>	<u>27.4</u>									
657.xz_s	12	435	14.2	<u>435</u>	<u>14.2</u>	435	14.2									

SPECspeed®2017\_int\_base = 13.7

SPECspeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-11

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH =  
"/home/PVT/speccpu-1.1.8\_ic2021.1\_b/lib/intel64:/home/PVT/speccpu-1.1.8\_ic2021.1\_b/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Sep-2021  
**Hardware Availability:** Nov-2021  
**Software Availability:** Jun-2021

### General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
Adjacent Cache Line Prefetch = Disabled  
DCU Streamer Prefetcher = Disabled  
Intel Virtualization Technology = Disabled  
Enhanced C-states = Disabled  
CState Pre-Wake = Disabled  
Energy Efficient Turbo = Disabled  
DDR PowerDown and idle counter = PCODE

Sysinfo program /home/PVT/speccpu-1.1.8\_ic2021.1\_b/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Wed Sep 15 22:13:20 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) E-2356G CPU @ 3.20GHz  
1 "physical id"s (chips)  
12 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 6  
siblings : 12  
physical 0: cores 0 1 2 3 4 5

From lscpu from util-linux 2.36.2:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 39 bits physical, 48 bits virtual  
CPU(s): 12  
On-line CPU(s) list: 0-11  
Thread(s) per core: 2  
Core(s) per socket: 6  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Sep-2021  
**Hardware Availability:** Nov-2021  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

```

CPU family:                6
Model:                     167
Model name:                Intel(R) Xeon(R) E-2356G CPU @ 3.20GHz
Stepping:                  1
CPU MHz:                   1100.364
CPU max MHz:               5000.0000
CPU min MHz:               800.0000
BogoMIPS:                  6384.00
Virtualization:            VT-x
L1d cache:                 288 KiB
L1i cache:                 192 KiB
L2 cache:                  3 MiB
L3 cache:                  12 MiB
NUMA node0 CPU(s):        0-11
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear flush_l1d arch_capabilities

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	512K	3M	8	Unified	2	1024	1	64
L3	12M	12M	16	Unified	3	12288	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Sep-2021  
**Hardware Availability:** Nov-2021  
**Software Availability:** Jun-2021

### Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 31511 MB
node 0 free: 30698 MB
node distances:
node    0
0:    10
```

```
From /proc/meminfo
MemTotal:      32267736 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021
(ba3c2e9/lp-5d9e8aa) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Sep-2021

Hardware Availability: Nov-2021

Software Availability: Jun-2021

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): sanitization  
 Mitigation: Enhanced IBRS, IBPB:  
 conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Sep 15 18:29

SPEC is set to: /home/PVT/speccpu-1.1.8\_ic2021.1\_b

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xf	365G	59G	307G	16%	/home

From /sys/devices/virtual/dmi/id

Vendor: FUJITSU

Product: D3930-A1

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
 2x Samsung M391A2K43DB1-CWE 16 GB 2 rank 3200

BIOS:

BIOS Vendor: FUJITSU // American Megatrends Inc.

BIOS Version: V5.0.0.22 R1.4.0 for D3930-A1x

BIOS Date: 09/03/2021

BIOS Revision: 1.4

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
      | 625.x264_s(base) 657.xz_s(base)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C++   | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      | 641.leela_s(base)
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Sep-2021  
**Hardware Availability:** Nov-2021  
**Software Availability:** Jun-2021

### Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
=====  
Fortran | 648.exchange2\_s(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifort

### Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

### Base Optimization Flags

C benchmarks:  
-DSPEC\_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX2

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Fujitsu

SPECspeed®2017\_int\_base = 13.7

PRIMERGY TX1310 M5, Intel Xeon E-2356G, 3.20GHz

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Sep-2021

Hardware Availability: Nov-2021

Software Availability: Jun-2021

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevA.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevA.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-15 09:13:20-0400.  
Report generated on 2021-10-12 17:17:41 by CPU2017 PDF formatter v6442.  
Originally published on 2021-10-12.