



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019


Test Date: Aug-2022

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2022

Tested by: Cisco Systems

Software Availability: Dec-2021

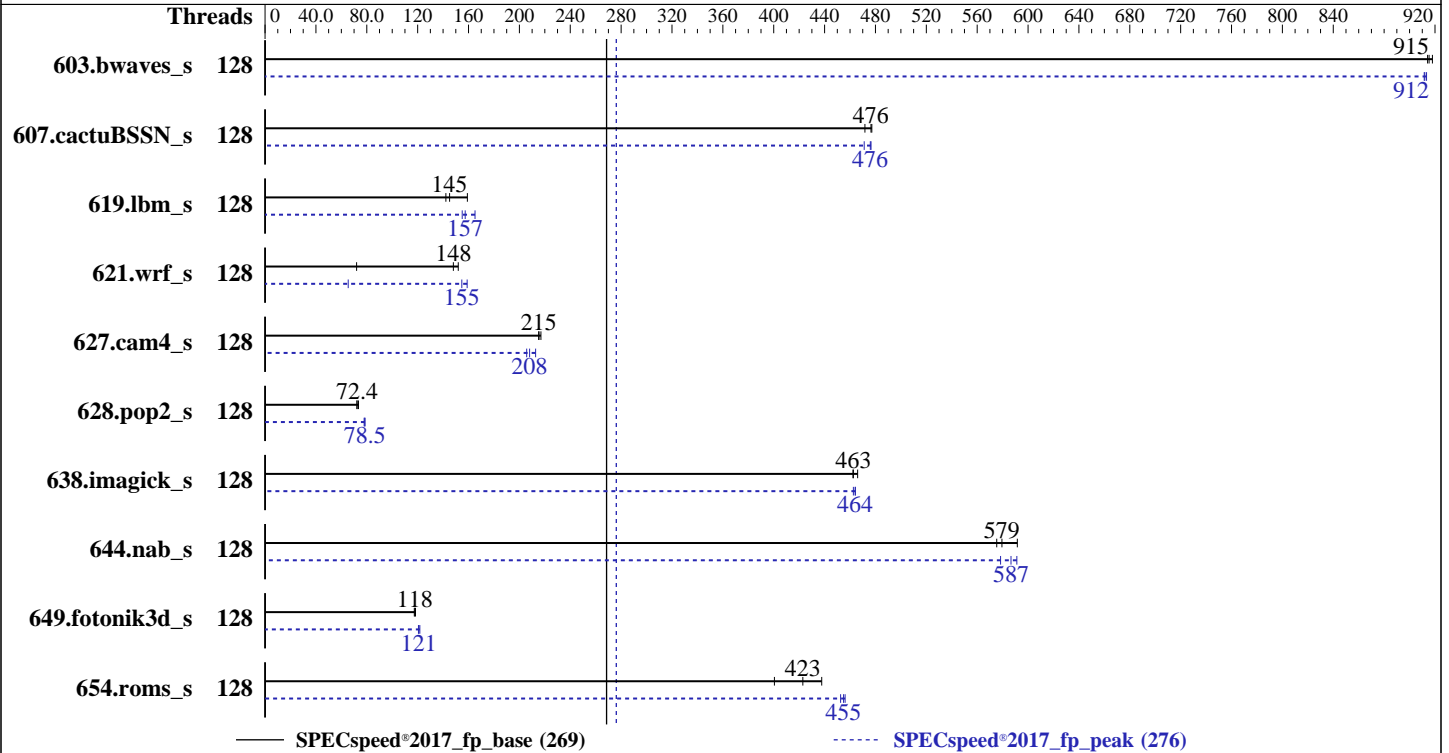

Hardware

CPU Name: AMD EPYC 7773X
 Max MHz: 3500
 Nominal: 2200
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 768 MB I+D on chip per chip, 96 MB shared / 8 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200V-L)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 kernel version 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: Yes
 Firmware: Version 4.2.2b released May-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECSpeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECSpeed®2017_fp_peak = 276

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Aug-2022
Hardware Availability: Mar-2022
Software Availability: Dec-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	64.5	915	64.5	914	64.3	918	128	64.7	912	64.7	912	64.6	913
607.cactuBSSN_s	128	34.9	477	35.0	476	35.3	472	128	35.0	476	35.4	471	35.0	477
619.lbm_s	128	36.1	145	32.9	159	36.8	142	128	31.7	165	33.3	157	33.8	155
621.wrf_s	128	89.3	148	184	72.0	87.1	152	128	83.2	159	85.5	155	202	65.4
627.cam4_s	128	40.9	217	41.1	215	41.2	215	128	41.7	213	42.6	208	43.1	206
628.pop2_s	128	164	72.4	164	72.2	162	73.5	128	152	77.9	151	78.5	151	78.5
638.imagick_s	128	31.2	462	31.0	466	31.2	463	128	31.2	463	31.1	464	31.1	464
644.nab_s	128	29.5	592	30.2	579	30.4	575	128	29.6	591	30.2	578	29.8	587
649.fotonik3d_s	128	77.7	117	77.1	118	77.4	118	128	75.6	121	75.4	121	74.9	122
654.roms_s	128	37.2	423	36.0	438	39.3	401	128	34.6	455	34.8	453	34.5	456

SPECSpeed®2017_fp_base = **269**

SPECSpeed®2017_fp_peak = **276**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_spee
d_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-127"

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Environment Variables Notes (Continued)

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-127"

PGHPPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-127"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings

SMT Mode set to Disabled

NUMA nodes per socket set to NPS1

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

L1 Stream HW Prefetcher set to Enabled

APBDIS set to 1

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost Fri Aug 12 04:30:36 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7773X 64-Core Processor

2 "physical id"s (chips)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 64
siblings  : 64
```

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu from util-linux 2.33.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):             2
NUMA node(s):         16
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                1
Model name:            AMD EPYC 7773X 64-Core Processor
Stepping:              2
CPU MHz:               1795.594
CPU max MHz:           2200.0000
CPU min MHz:           1500.0000
BogoMIPS:              4391.80
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              98304K
NUMA node0 CPU(s):    0-7
NUMA node1 CPU(s):    8-15
NUMA node2 CPU(s):    16-23
NUMA node3 CPU(s):    24-31
NUMA node4 CPU(s):    32-39
NUMA node5 CPU(s):    40-47
NUMA node6 CPU(s):    48-55
NUMA node7 CPU(s):    56-63
NUMA node8 CPU(s):    64-71
NUMA node9 CPU(s):    72-79
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```

NUMA node10 CPU(s): 80-87
NUMA node11 CPU(s): 88-95
NUMA node12 CPU(s): 96-103
NUMA node13 CPU(s): 104-111
NUMA node14 CPU(s): 112-119
NUMA node15 CPU(s): 120-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 128834 MB
node 0 free: 128684 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 129021 MB
node 1 free: 128931 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 129021 MB
node 2 free: 128933 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 129021 MB
node 3 free: 128891 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 129021 MB
node 4 free: 128875 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 129021 MB
node 5 free: 128934 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 129021 MB
node 6 free: 128924 MB
node 7 cpus: 56 57 58 59 60 61 62 63

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```

node 7 size: 116909 MB
node 7 free: 116823 MB
node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 129021 MB
node 8 free: 128915 MB
node 9 cpus: 72 73 74 75 76 77 78 79
node 9 size: 129021 MB
node 9 free: 128919 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 129021 MB
node 10 free: 128882 MB
node 11 cpus: 88 89 90 91 92 93 94 95
node 11 size: 129021 MB
node 11 free: 128782 MB
node 12 cpus: 96 97 98 99 100 101 102 103
node 12 size: 129021 MB
node 12 free: 128879 MB
node 13 cpus: 104 105 106 107 108 109 110 111
node 13 size: 129021 MB
node 13 free: 128933 MB
node 14 cpus: 112 113 114 115 116 117 118 119
node 14 size: 129021 MB
node 14 free: 128934 MB
node 15 cpus: 120 121 122 123 124 125 126 127
node 15 size: 128982 MB
node 15 free: 128878 MB

```

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	11	11	11	11	11	11	32	32	32	32	32	32	32	32
1:	11	10	11	11	11	11	11	11	32	32	32	32	32	32	32	32
2:	11	11	10	11	11	11	11	11	32	32	32	32	32	32	32	32
3:	11	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32
4:	11	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32
5:	11	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32
6:	11	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32
7:	11	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11
9:	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11
10:	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11
11:	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11
12:	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11
13:	32	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11
14:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11
15:	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10

From /proc/meminfo

MemTotal: 2101257636 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Aug-2022
Hardware Availability: Mar-2022
Software Availability: Dec-2021

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*
os-release:

```
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 10 04:24

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	xfs	223G	17G	207G	8%	/

From /sys/devices/virtual/dmi/id
Vendor: Cisco Systems Inc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Aug-2022
Hardware Availability: Mar-2022
Software Availability: Dec-2021

Platform Notes (Continued)

Product: UCSC-C225-M6S
Serial: WZP252408JE

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200
16x Unknown Unknown

BIOS:
BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C225M6.4.2.2b.0.0509222122
BIOS Date: 05/09/2022
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
644.nab_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Aug-2022
Hardware Availability: Mar-2022
Software Availability: Dec-2021

Compiler Version Notes (Continued)

LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

```
638.imagick_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

638.imagick_s (continued):

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

621.wrf_s (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

627.cam4_s: Same as 621.wrf_s

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 269

Cisco UCS C225 M6 (AMD EPYC 7773X)

SPECspeed®2017_fp_peak = 276

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -Mrecursive  
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp  
-lomp -lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-12 07:30:36-0400.

Report generated on 2022-08-31 20:08:56 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-30.