



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573


Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

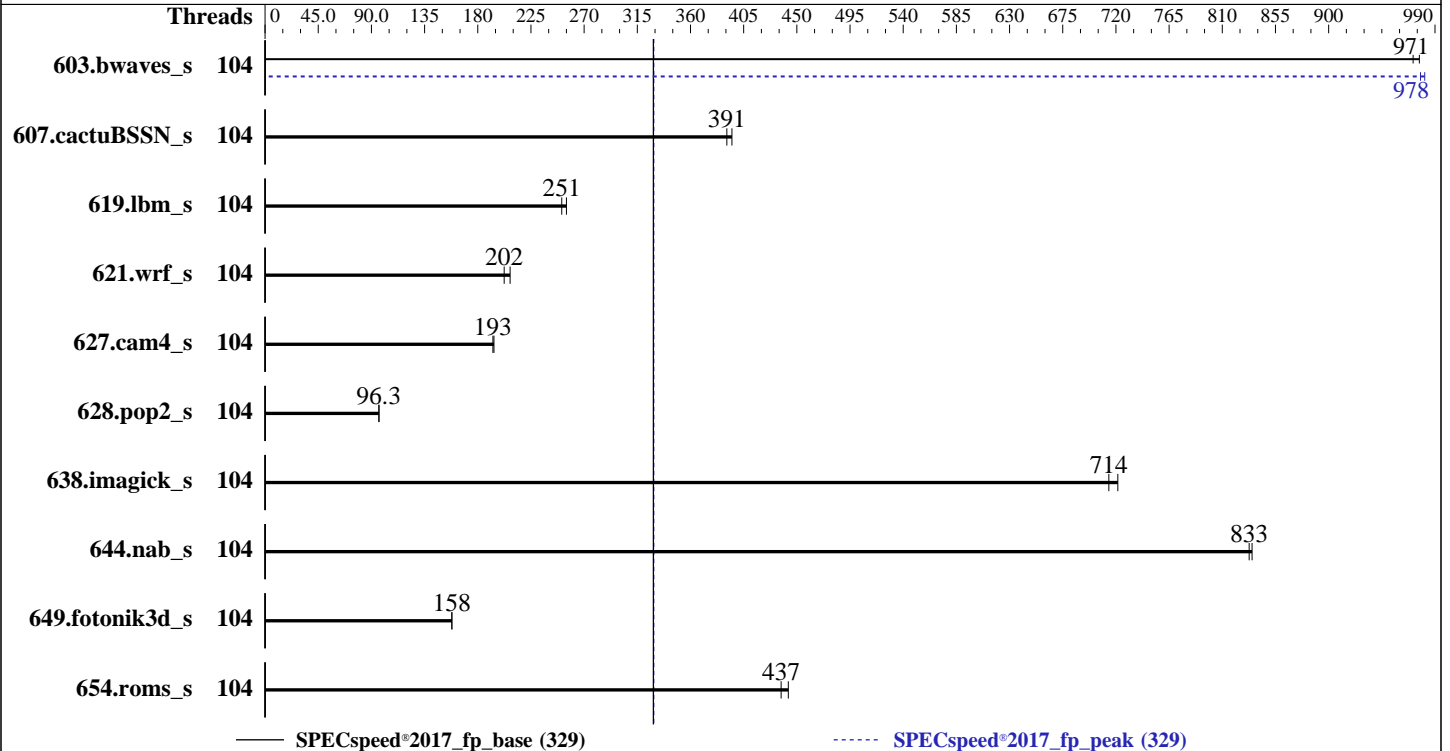

## Hardware

CPU Name: Intel Xeon Platinum 8470Q  
 Max MHz: 3800  
 Nominal: 2100  
 Enabled: 104 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 125 GB on tmpfs  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 1.0.0 released Mar-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECSpeed®2017\_fp\_peak = 329

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: Jun-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	104	60.4	977	<b>60.7</b>	<b>971</b>			104	<b>60.3</b>	<b>978</b>	60.1	981		
607.cactuBSSN_s	104	42.2	395	<b>42.7</b>	<b>391</b>			104	42.2	395	<b>42.7</b>	<b>391</b>		
619.lbm_s	104	20.5	255	<b>20.9</b>	<b>251</b>			104	20.5	255	<b>20.9</b>	<b>251</b>		
621.wrf_s	104	63.8	207	<b>65.4</b>	<b>202</b>			104	63.8	207	<b>65.4</b>	<b>202</b>		
627.cam4_s	104	<b>46.0</b>	<b>193</b>	45.8	194			104	<b>46.0</b>	<b>193</b>	45.8	194		
628.pop2_s	104	<b>123</b>	<b>96.3</b>	123	96.5			104	<b>123</b>	<b>96.3</b>	123	96.5		
638.imagick_s	104	<b>20.2</b>	<b>714</b>	20.0	722			104	<b>20.2</b>	<b>714</b>	20.0	722		
644.nab_s	104	<b>21.0</b>	<b>833</b>	20.9	835			104	<b>21.0</b>	<b>833</b>	20.9	835		
649.fotonik3d_s	104	<b>57.7</b>	<b>158</b>	57.7	158			104	<b>57.7</b>	<b>158</b>	57.7	158		
654.roms_s	104	<b>36.1</b>	<b>437</b>	35.6	443			104	<b>36.1</b>	<b>437</b>	35.6	443		

SPECSpeed®2017\_fp\_base = **329**

SPECSpeed®2017\_fp\_peak = **329**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Platform Notes

### BIOS settings:

ADDDC Setting : Disabled  
 DIMM Self Healing on  
 Uncorrectable Memory Error : Disabled  
 Logical Processor : Disabled  
 Virtualization Technology : Disabled  
 Sub NUMA Cluster : 2-way Clustering  
 Optimizer Mode : Enabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 C1E : Disabled  
 C States : Autonomous  
 Memory Patrol Scrub : Disabled  
 Energy Efficiency Policy : Performance  
 PCI ASPM L1 Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Tue Jun 27 19:04:49 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222/lp)
x86_64 x86_64 x86_64 GNU/Linux
  
```

```

2. w
19:04:49 up 2:16, 3 users, load average: 6.14, 6.37, 3.81
  
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: Jun-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1     -             16:48   2:14m  1.32s  0.00s /bin/bash ./dell-run-specspeed.sh
--iterations 2 --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --define Dell-BIOS-LogProcD=1
```

-----  
3. Username  
From environment variable \$USER: root

-----  
4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2060169  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2060169  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 34  
login -- root  
-bash  
/bin/bash ./DELL\_speed.sh  
/bin/bash ./dell-run-main.sh speed  
/bin/bash ./dell-run-main.sh speed  
/bin/bash ./dell-run-specspeed.sh --iterations 2 --output\_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS\_Xeon-4.inc --define Dell-BIOS-LogProcD=1  
/bin/bash ./dell-run-specspeed.sh --iterations 2 --output\_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS\_Xeon-4.inc --define Dell-BIOS-LogProcD=1  
runcpu --nobuild --action validate --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak -o all --define drop\_caches --iterations 2 --output\_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS\_Xeon-4.inc --define Dell-BIOS-LogProcD=1 fpspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=104 --tune base,peak --output\_format all --define drop\_caches --iterations 2 --output\_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS\_Xeon-4.inc --define Dell-BIOS-LogProcD=1 --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

-----  
6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8470Q  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: Jun-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```

microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 52
siblings       : 52
2 physical ids (chips)
104 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                104
On-line CPU(s) list:  0-103
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8470Q
CPU family:            6
Model:                 143
Thread(s) per core:   1
Core(s) per socket:   52
Socket(s):             2
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                      cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                      arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                      bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                      tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

L1d cache:            4.9 MiB (104 instances)
L1i cache:            3.3 MiB (104 instances)
L2 cache:             208 MiB (104 instances)
L3 cache:             210 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):   0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 88, 92, 96, 100
NUMA node1 CPU(s):   2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86, 90, 94, 98, 102

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECSpeed®2017\_fp\_peak = 329

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Jun-2023  
**Hardware Availability:** Jun-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

                                02
NUMA node2 CPU(s):             1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,10
                                1
NUMA node3 CPU(s):             3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,1
                                03
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:             Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:        Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:       Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:       Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort:  Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100
node 0 size: 128363 MB
node 0 free: 127737 MB
node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102
node 1 size: 129017 MB
node 1 free: 128154 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101
node 2 size: 129017 MB
node 2 free: 128183 MB
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103
node 3 size: 128669 MB
node 3 free: 112869 MB
node distances:
node  0  1  2  3
  0:  10  12  21  21
  1:  12  10  21  21
  2:  21  21  10  12
  3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 527429132 kB

10. who -r

run-level 3 Jun 27 16:49 last=5

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573

Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcx4 wickedd-dhcx6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root ipmi ipmievdc iscsi-init iscsid iscsiio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 upower wpa_supplicant@
indirect	pcsd saned@ wickedd

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=3757ffab-74c4-4c1d-ad87-5cec94a9329d
splash=silent
resume=/dev/disk/by-uuid/69fef525-d33c-4f45-ba84-662bbc343f8b
mitigations=auto
quiet
security=apparmor
crashkernel=319M,high
crashkernel=72M,low
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode            0
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

```

16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs 125G  11G  115G   9% /mnt/ramdisk

```

```

20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R760xa
Product Family: PowerEdge
Serial:      1234567

```

```

21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x 002C00B3002C MTC20F2085S1RC48BA1 32 GB 2 rank 4800

```

```

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.0.0
BIOS Date:        03/10/2023
BIOS Revision:    1.0

```

## Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: Jun-2023  
Software Availability: Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2023  
Hardware Availability: Jun-2023  
Software Availability: Dec-2022

## Base Portability Flags (Continued)

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 329

PowerEdge R760xa (Intel Xeon Platinum 8470Q)

SPECspeed®2017\_fp\_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-27 07:04:49-0400.

Report generated on 2023-08-16 14:16:21 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.