



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jan-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

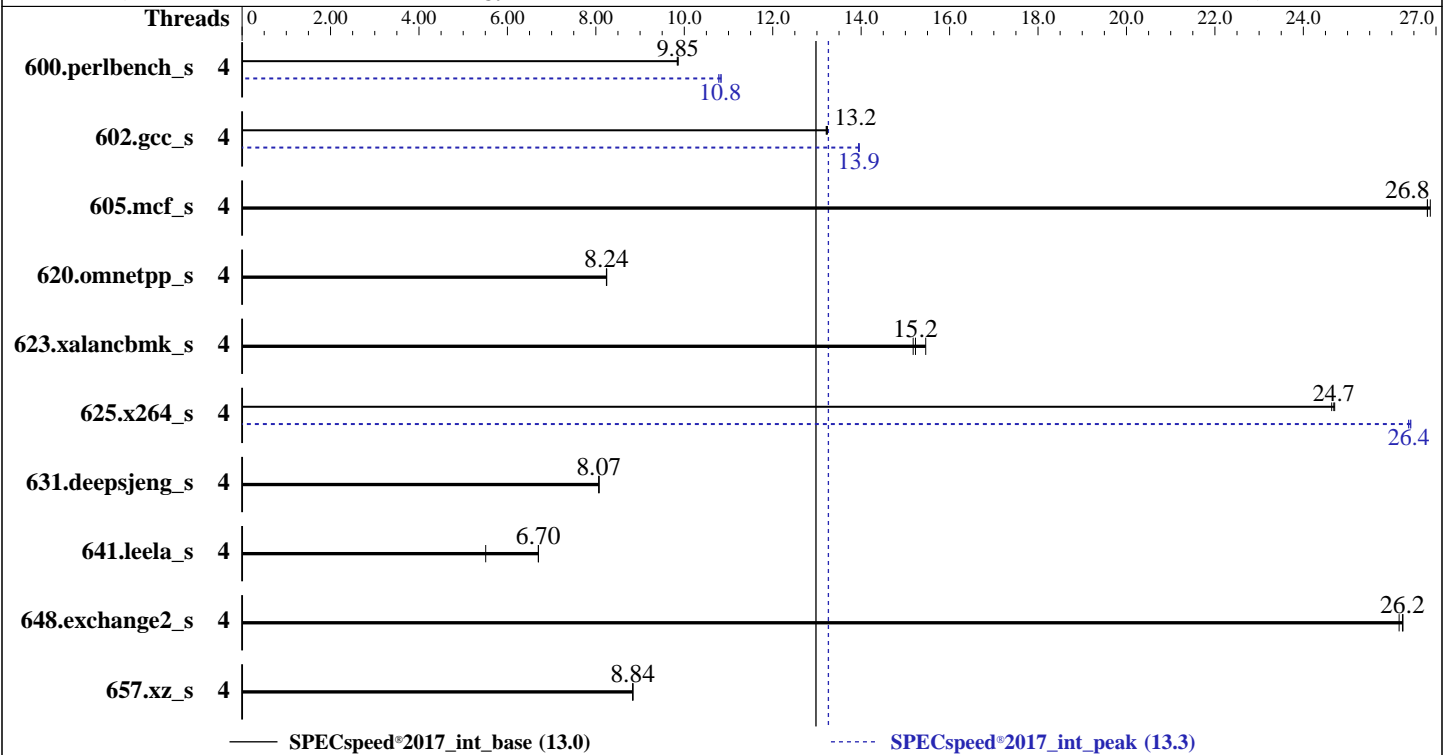

### Hardware

CPU Name: Intel Xeon E-2414  
 Max MHz: 4500  
 Nominal: 2600  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.3 (Plow)  
 Kernel 5.14.0-362.8.1.el9\_3.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version CTE101Z 1.10 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	4	180	9.86	<b>180</b>	<b>9.85</b>	180	9.84	4	164	10.8	165	10.8	<b>164</b>	<b>10.8</b>
602.gcc_s	4	301	13.2	301	13.2	<b>301</b>	<b>13.2</b>	4	<b>286</b>	<b>13.9</b>	286	13.9	285	14.0
605.mcf_s	4	176	26.9	<b>176</b>	<b>26.8</b>	176	26.8	4	176	26.9	<b>176</b>	<b>26.8</b>	176	26.8
620.omnetpp_s	4	198	8.25	198	8.24	<b>198</b>	<b>8.24</b>	4	198	8.25	198	8.24	<b>198</b>	<b>8.24</b>
623.xalancbmk_s	4	93.4	15.2	91.7	15.5	<b>93.0</b>	<b>15.2</b>	4	93.4	15.2	91.7	15.5	<b>93.0</b>	<b>15.2</b>
625.x264_s	4	<b>71.5</b>	<b>24.7</b>	71.6	24.6	71.4	24.7	4	66.9	26.4	66.7	26.4	<b>66.8</b>	<b>26.4</b>
631.deepsjeng_s	4	178	8.07	178	8.07	<b>178</b>	<b>8.07</b>	4	178	8.07	178	8.07	<b>178</b>	<b>8.07</b>
641.leela_s	4	<b>255</b>	<b>6.70</b>	255	6.70	310	5.51	4	<b>255</b>	<b>6.70</b>	255	6.70	310	5.51
648.exchange2_s	4	112	26.2	<b>112</b>	<b>26.2</b>	112	26.3	4	112	26.2	<b>112</b>	<b>26.2</b>	112	26.3
657.xz_s	4	700	8.83	700	8.84	<b>700</b>	<b>8.84</b>	4	700	8.83	700	8.84	<b>700</b>	<b>8.84</b>

SPECspeed®2017\_int\_base = **13.0**

SPECspeed®2017\_int\_peak = **13.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2023.2.3/lib/intel164:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

```

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

CPU P-state Control set to Cooperative with Legacy

C-States set to Legacy

Turbo Limit for 95W CPU set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Tue Jan 23 13:28:00 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-18.e19)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-362.8.1.el9\_3.x86\_64 #1 SMP PREEMPT\_DYNAMIC Tue Oct 3 11:12:36 EDT 2023  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
13:28:00 up 2 min, 1 user, load average: 0.07, 0.02, 0.00  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 13:27 6.00s 0.68s 0.00s -bash  
-----

-----  
3. Username  
From environment variable \$USER: root  
-----

-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

scheduling priority          (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 256661
max locked memory           (kbytes, -l) 64
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority          (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 256661
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=4 --tune base,peak -o all --define
  intspeedaffinity --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=4 --tune base,peak --output_format all --define
  intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed intspeed
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.065/temlogs/preenv.intspeed.065.0.log --lognum 065.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) E E-2414
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping      : 1
microcode     : 0x11f
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 4
siblings      : 4
1 physical ids (chips)
4 processors (hardware threads)
physical id 0: core ids 0-3
physical id 0: apicids 0,2,4,6
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         42 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                4
On-line CPU(s) list:  0-3

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.0

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) E E-2414
BIOS Model name: Intel(R) Xeon(R) E E-2414
CPU family: 6
Model: 183
Thread(s) per core: 1
Core(s) per socket: 4
Socket(s): 1
Stepping: 1
CPU max MHz: 4500.0000
CPU min MHz: 800.0000
BogoMIPS: 5222.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb srbds ibrs ibpb stibp
ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
avx_vnni dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
hwp_pkg_req hfi vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme
rdpid movdiri movdir64b fsrm md_clear serialize pconfig arch_lbr ibt
flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 192 KiB (4 instances)
L1i cache: 128 KiB (4 instances)
L2 cache: 8 MiB (4 instances)
L3 cache: 12 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-3
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
PBRSE-eIBRS SW sequence

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 192K 12 Data 1 64 1 64
L1i 32K 128K 8 Instruction 1 64 1 64
L2 2M 8M 16 Unified 2 2048 1 64
L3 12M 12M 6 Unified 3 32768 1 64

```

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-3

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
node 0 size: 64208 MB
node 0 free: 63567 MB
node distances:
node 0
0: 10
```

```
-----
9. /proc/meminfo
MemTotal: 65749252 kB
```

```
-----
10. who -r
run-level 3 Jan 23 13:25
```

```
-----
11. Systemd service manager version: systemd 252 (252-18.e19)
Default Target Status
multi-user running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
chronyd crond dbus-broker firewallld getty@ insights-client-boot irqbalance iscsi
iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor
microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
dnf-system-upgrade iprdump iprinit iprupdate iscsid iscsiuiop kpatch kvm_stat ledmon
man-db-restart-cache-update nftables nvme-autoconnect pesign psacct rdisc rhcd rhsm
rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-362.8.1.el9_3.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 4.50 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

15. tuned-adm active  
Current active profile: throughput-performance

```

16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.3 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.3 (Plow)
system-release  Red Hat Enterprise Linux release 9.3 (Plow)

```

```

20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   344G  14G  330G   5% /home

```

```

21. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR250 V3
Product Family: ThinkSystem

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

Serial: 1234567890

#### 22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

1x Samsung M324R4GA3BB0-CQKOD 32 GB 2 rank 4800, configured at 4400  
1x Samsung M324R4GA3BB0-CQKOL 32 GB 2 rank 4800, configured at 4400

#### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: CTE101Z-1.10  
BIOS Date: 12/27/2023  
BIOS Revision: 1.10  
Firmware Revision: 1.10

### Compiler Version Notes

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 648.exchange2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V3  
(2.60 GHz, Intel Xeon E-2414)

SPECspeed®2017\_int\_base = 13.0

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Catlow-A.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-23 00:28:00-0500.

Report generated on 2024-02-20 14:11:13 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-20.