



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Jun-2023

Software Availability: Oct-2023

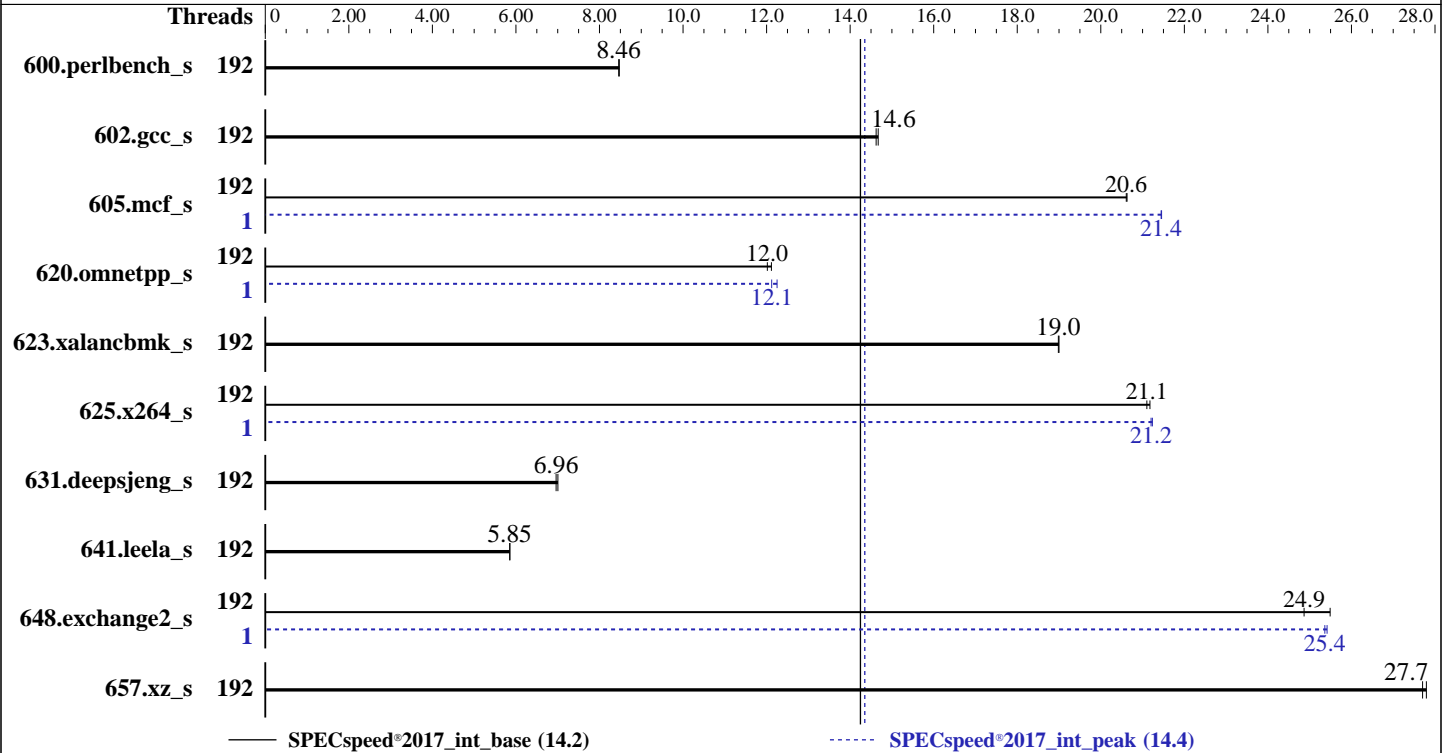

Hardware

CPU Name: AMD EPYC 9684X
 Max MHz: 3700
 Nominal: 2550
 Enabled: 192 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 1152 MB I+D on chip per chip, 96 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 110 GB on tmpfs
 Other: None

Software

OS: Ubuntu 22.04.3 LTS
 5.15.0-86-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.4.6 released Jul-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Jun-2023
Software Availability: Oct-2023

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|-----------------|---------|-------------------|--------------------|--------------------|--------------------|---------|-------|---------|-------------------|--------------------|--------------------|--------------------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 192 | 209 | 8.47 | <u>210</u> | <u>8.46</u> | | | 192 | 209 | 8.47 | <u>210</u> | <u>8.46</u> | | |
| 602.gcc_s | 192 | 271 | 14.7 | <u>272</u> | <u>14.6</u> | | | 192 | 271 | 14.7 | <u>272</u> | <u>14.6</u> | | |
| 605.mcf_s | 192 | 229 | 20.6 | <u>229</u> | <u>20.6</u> | | | 1 | <u>220</u> | <u>21.4</u> | 220 | 21.5 | | |
| 620.omnetpp_s | 192 | <u>136</u> | <u>12.0</u> | 135 | 12.1 | | | 1 | 133 | 12.3 | <u>135</u> | <u>12.1</u> | | |
| 623.xalancbmk_s | 192 | 74.6 | 19.0 | <u>74.6</u> | <u>19.0</u> | | | 192 | 74.6 | 19.0 | <u>74.6</u> | <u>19.0</u> | | |
| 625.x264_s | 192 | 83.3 | 21.2 | <u>83.6</u> | <u>21.1</u> | | | 1 | 83.1 | 21.2 | <u>83.2</u> | <u>21.2</u> | | |
| 631.deepsjeng_s | 192 | <u>206</u> | <u>6.96</u> | 205 | 7.00 | | | 192 | <u>206</u> | <u>6.96</u> | 205 | 7.00 | | |
| 641.leela_s | 192 | <u>292</u> | <u>5.85</u> | 291 | 5.86 | | | 192 | <u>292</u> | <u>5.85</u> | 291 | 5.86 | | |
| 648.exchange2_s | 192 | <u>118</u> | <u>24.9</u> | 115 | 25.5 | | | 1 | 116 | 25.4 | <u>116</u> | <u>25.4</u> | | |
| 657.xz_s | 192 | 222 | 27.8 | <u>223</u> | <u>27.7</u> | | | 192 | 222 | 27.8 | <u>223</u> | <u>27.7</u> | | |

SPECspeed®2017_int_base = 14.2

SPECspeed®2017_int_peak = 14.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Jun-2023

Software Availability: Oct-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 648.exchange2_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 110 GB ramdisk created with the cmd: "mount -t tmpfs -o size=110G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
```

```
Logical Processor : Disabled
Virtualization Technology : Disabled
NUMA Nodes per Socket : 2
```

```
System Profile : Custom
C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link
Power Management : Disabled
Determinism Slider : Power Determinism
Algorithm Performance
Boost Disable (ApbDis) : Enabled
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Jun-2023

Software Availability: Oct-2023

Platform Notes (Continued)

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-spa Sun Dec 10 01:38:26 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux amd-spa 5.15.0-86-generic #96-Ubuntu SMP Wed Sep 20 08:23:49 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:38:26 up 1 min, 1 user, load average: 0.28, 0.10, 0.03
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1    -             01:37   34.00s  1.82s  0.38s /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6190284
nofiles            1024
vmemory(kbytes)    unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Jun-2023
Software Availability: Oct-2023

Platform Notes (Continued)

locks unlimited
rtprio 0

```

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt intspeak
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size
test:train:refspeed intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeak.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

```

```

6. /proc/cpuinfo
model name      : AMD EPYC 9684X 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 2
microcode      : 0xa10123e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs0
TLB size       : 3584 4K pages
cpu cores      : 96
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             192
On-line CPU(s) list: 0-191
Vendor ID:          AuthenticAMD
Model name:         AMD EPYC 9684X 96-Core Processor

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Jun-2023
Software Availability: Oct-2023

Platform Notes (Continued)

```

CPU family:                25
Model:                     17
Thread(s) per core:       1
Core(s) per socket:       96
Socket(s):                 2
Stepping:                 2
BogoMIPS:                 5101.59
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                          clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                          lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                          rapl pni pclmulqdq monitor sse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                          movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                          cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                          topoext perfctr_core perfctr_nb bpeext perfctr_llc mwaitx cpb cat_l3
                          cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                          fsgsbase bmlil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                          rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                          avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                          cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                          wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                          vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                          v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                          gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                          rdpid overflow_recov succor smca fsrm flush_lld
Virtualization:           AMD-V
L1d cache:                6 MiB (192 instances)
L1i cache:                6 MiB (192 instances)
L2 cache:                 192 MiB (192 instances)
L3 cache:                 2.3 GiB (24 instances)
NUMA node(s):             8
NUMA node0 CPU(s):       0-23
NUMA node1 CPU(s):       24-47
NUMA node2 CPU(s):       48-71
NUMA node3 CPU(s):       72-95
NUMA node4 CPU(s):       96-119
NUMA node5 CPU(s):       120-143
NUMA node6 CPU(s):       144-167
NUMA node7 CPU(s):       168-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability Lltf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:         Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:         Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                  filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:              Not affected
Vulnerability Tsx async abort:    Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d   32K      6M      8 Data          1     64     1           64
L1i   32K      6M      8 Instruction   1     64     1           64
L2    1M      192M     8 Unified       2    2048    1           64
L3    96M     2.3G    16 Unified       3  98304    1           64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-23
node 0 size: 193074 MB
node 0 free: 192595 MB
node 1 cpus: 24-47
node 1 size: 193528 MB
node 1 free: 192936 MB
node 2 cpus: 48-71
node 2 size: 193528 MB
node 2 free: 193095 MB
node 3 cpus: 72-95
node 3 size: 193465 MB
node 3 free: 189504 MB
node 4 cpus: 96-119
node 4 size: 193528 MB
node 4 free: 193076 MB
node 5 cpus: 120-143
node 5 size: 193528 MB
node 5 free: 193125 MB
node 6 cpus: 144-167
node 6 size: 193528 MB
node 6 free: 193131 MB
node 7 cpus: 168-191
node 7 size: 193501 MB
node 7 free: 192853 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1584828324 kB

10. who -r

run-level 5 Dec 10 01:37

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
getty@ grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
lxd-agent multipathd pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd
systemd-pstore systemd-resolved systemd-timesyncd thermald tuned udisks2
enabled-runtime systemd-fsck-root systemd-remount-fs

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Platform Notes (Continued)

```

disabled      console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
              systemd-boot-check-no-failures systemd-network-generator systemd-sysext
              systemd-time-wait-sync upower
generated     apport
indirect      uuidd
masked        cryptdisks cryptdisks-early gpu-manager hwclock lvm2 multipath-tools-boot
              networkd-dispatcher open-vm-tools rc rcS screen-cleanup sudo systemd-networkd-wait-online
              ua-reboot-cmds ubuntu-advantage ufw vgauth vmttoolsd x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-5.15.0-86-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2550MHz

```

```

-----
15. tuned-adm active
  Current active profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Jun-2023
Software Availability: Oct-2023

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS
```

20. Disk information

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 110G 3.4G 107G 4% /mnt/ramdisk
```

21. /sys/devices/virtual/dmi/id

```
Vendor: Dell Inc.
Product: PowerEdge R7625
Product Family: PowerEdge
Serial: 1234567
```

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
24x 802C0000802C MTC40F2046SIRC48BA1 64 GB 2 rank 4800
```

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: Dell Inc.
BIOS Version: 1.4.6
BIOS Date: 07/06/2023
BIOS Revision: 1.4
```

Compiler Version Notes

```
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

```
C++ | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak) 631.deepsjeng_s(base, peak)
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2023

Tested by: Dell Inc.

Software Availability: Oct-2023

Compiler Version Notes (Continued)

| 641.leela_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Jun-2023

Software Availability: Oct-2023

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Jun-2023

Software Availability: Oct-2023

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition -Ofast -march=znver4

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-fstruct-layout=9 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: Same as 605.mcf_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -finline-aggressive -mllvm -unroll-threshold=100

-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Jun-2023

Software Availability: Oct-2023

Peak Optimization Flags (Continued)

620.omnetpp_s (continued):

-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.2

PowerEdge R7625 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_int_peak = 14.4

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: Jun-2023

Software Availability: Oct-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-09 20:38:26-0500.
Report generated on 2024-03-14 10:54:47 by CPU2017 PDF formatter v6716.
Originally published on 2024-03-13.