




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant DL380 G4 (3.6GHz, Intel Xeon)

SPECfp_rate2000 = 20.3
SPECfp_rate_base2000 = 20.1

SPEC license #: 3 Tested by: Hewlett-Packard Company Test date: Feb-2005 Hardware Avail: Mar-2005 Software Avail: Feb-2005

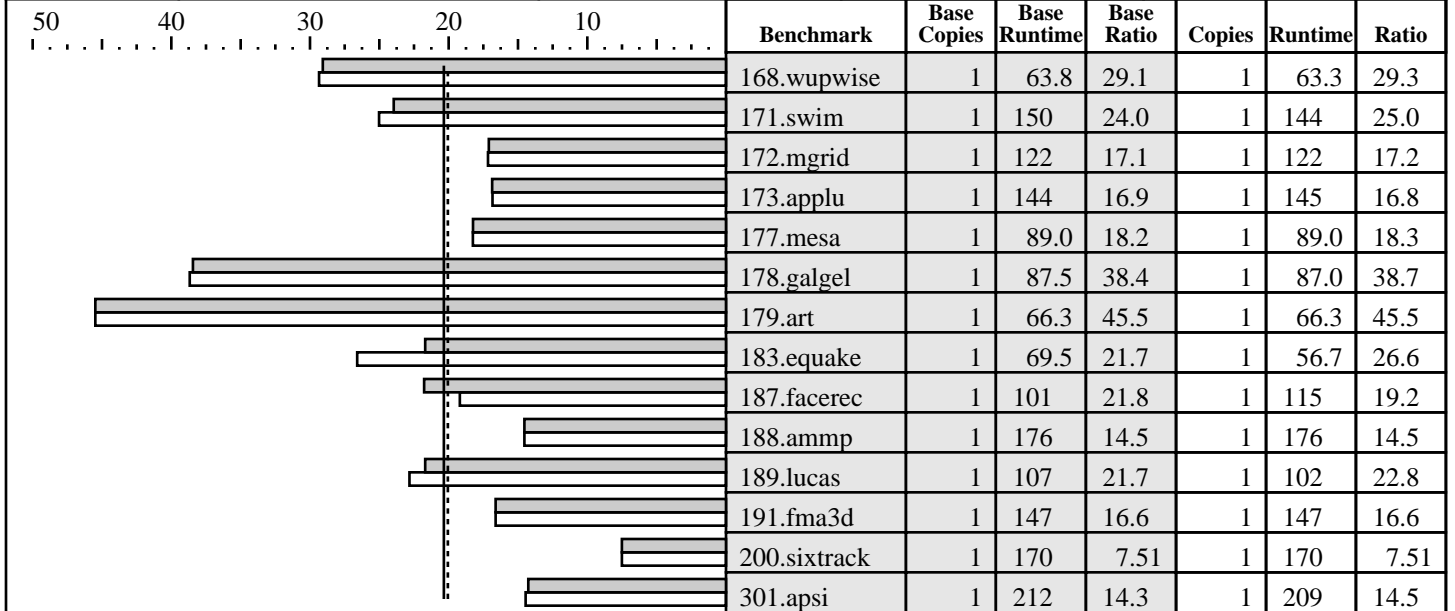

Hardware

CPU: Intel Xeon (3.6GHz, 2MB L2, 800MHz bus)
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
 CPU(s) orderable: 1,2
 Parallel: No
 Primary Cache: 12K micro-ops I + 16KBD on chip
 Secondary Cache: 2048KB(I+D) on chip
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 4x1024MB PC2-3200
 Disk Subsystem: 1x18.2GB 15K Ultra320 SCSI
 Other Hardware:

Software

Operating System: Windows Server 2003 Standard (Build 3790)
 Compiler: Intel C++ Compiler 8.1 Build 20040802Z
 Intel Fortran Compiler 8.1 build 20040802Z
 Microsoft Visual Studio .NET 7.0.9466 (for libraries)
 MicroQuill Smartheap Library 7.0
 File System: NTFS
 System State: Default

Notes/Tuning Information

+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use

Base tuning: -fast -Qansi_alias +FDO

Portability flags:

178.galgel: -FI /F32000000

Peak tuning:

168.wupwise: -fast -Qansi_alias +FDO

171.swim: -fast -f77rtl +FDO ONESTEP=yes

172.mgrid: -fast -Qansi_alias +FDO

173.applu: -fast -Qscalar_rep- -Qauto -f77rtl +FDO ONESTEP=yes

177.mesa: -fast +FDO ONESTEP=yes

178.galgel: -fast +FDO ONESTEP=yes

179.art: basepeak=1

183.quake: -fast -Oa -Qrcd +FDO ONESTEP=yes shlw32M.lib

187.facerec: -fast -Qunroll1 -Qscalar_rep- -fpp +FDO ONESTEP=yes

188.amp: basepeak=1



CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant DL380 G4 (3.6GHz, Intel Xeon)

SPECfp_rate2000 = 20.3
SPECfp_rate_base2000 = 20.1

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Feb-2005 | Hardware Avail: Mar-2005 | Software Avail: Feb-2005

Notes/Tuning Information (Continued)

```
189.lucas:          -fast
191.fma3d:          basepeak=1
200.sixtrack:       -fast
301.apsi:           -fast
                   -f77rtl +FDO ONESTEP=yes
BIOS Configuration Notes
Hyper-Threading Technology disabled
```