SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

IBM Corporation
RISC System/6000 43P

SPECint95 = --

SPECint_base95 = 4.45

SPEC license # 11 | Tested By: IBM, Austin, TX | Test Date: Aug-95 | Hardware Avail: Jul-95 | Software Avail: Aug-95

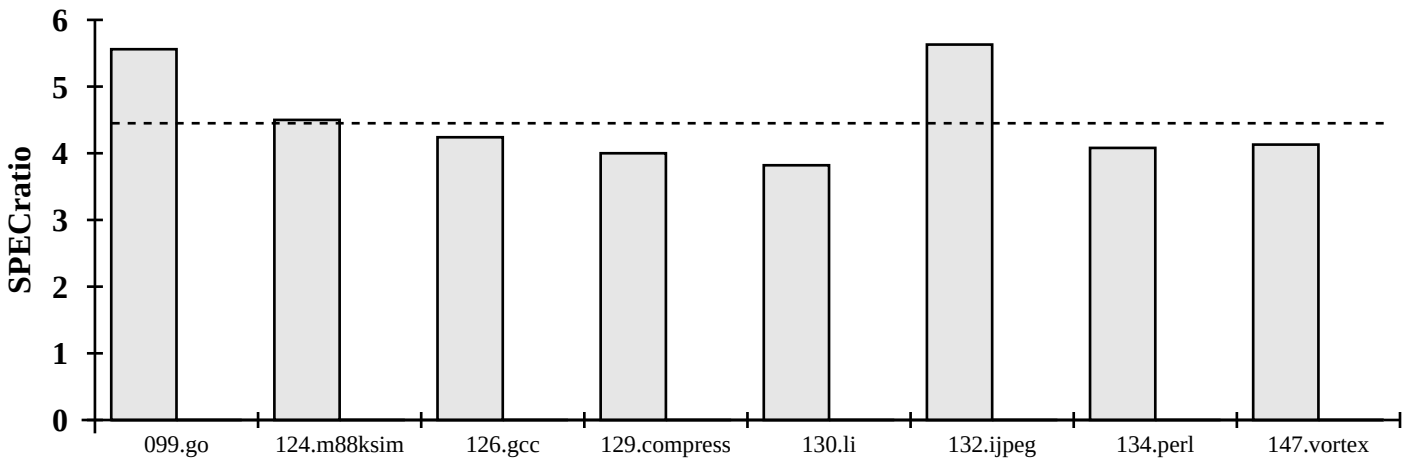

Hardware/Software Configuration for:
RISC System/6000 43P

Hardware

Model Name:	RS/6000 43P
CPU:	133MHz PowerPC 604
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI + 16KBD on chip
Secondary Cache:	512KB(I+D) off chip
Other Cache:	None
Memory:	192MB
Disk Subsystem:	2 x 2.0GB
Other Hardware:	None

Software

Operating System:	AIX Vers. 4.1.3
Compiler:	IBM CSet++ Vers. 3.1.2
File System:	AIX/JFS
System State:	Multi-User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	827	5.56	--	--
124.m88ksim	1900	423	4.50	--	--
126.gcc	1700	401	4.24	--	--
129.compress	1800	450	4.00	--	--
130.li	1900	498	3.82	--	--
132.ijpeg	2400	427	5.63	--	--
134.perl	1900	466	4.08	--	--
147.vortex	2700	654	4.13	--	--
SPECint_base95 (G. Mean)			4.45		
		SPECint95 (G. Mean)			--

Notes/Tuning Information

```
All compiled with -O3 -qarch=ppc -Q=500 -qpdf1/pdf2
Portability: 126.gcc = -ma 134.perl = -DI_TIME -DI_SYS_TIME
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org